




Vridknut 120-9-15

Nät producerat av TRIGALV® low alt. high carbon tråd* vertikala trådar är avklippta och virade runt de horisontella trådarna.


**ISO 16120-2 Non alloy steel wire rod for conversion to wire Part 2: Specific requirements for general purpose wire rod.*

**EN10244-2 Steel wire and wire products – Non-ferrous metallic coatings on steel wire Part 2: Zinc or zinc-alloy coatings.*

120-9-15 = Höjd/Antal Horisontella Trådar/Bredd Lodräta trådar

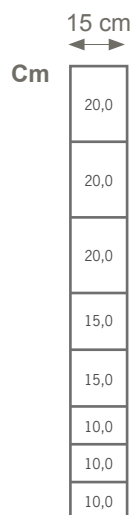

120/9/15

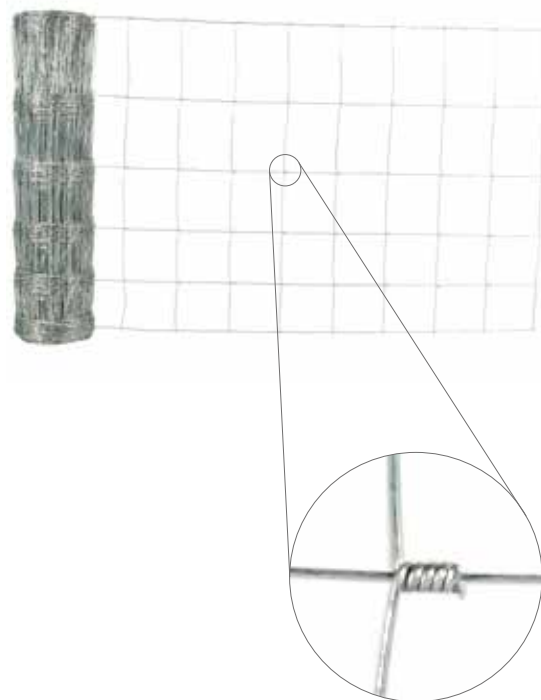

MEDIUM

	Dia mm	100 m/rulle TS N/mm ²
Selvedge Wire (kantråd)	2,50	1150-1350
Line wire	2,00	1200-1400
Stay wire	1,90	400-550