




## Vridknut 90-6-15

Nät producerat av TRIGALV® low alt. high carbon tråd\* vertikala trådar är avklippta och virade runt de horisontella trådarna.


\*ISO 16120-2 Non alloy steel wire rod for conversion to wire Part 2: Specific requirements for general purpose wire rod.

\*EN10244-2 Steel wire and wire products – Non-ferrous metallic coatings on steel wire Part 2: Zinc or zinc-alloy coatings.

**90-6-15** = Höjd/Antal Horisontella Trådar/Bredd Lodräta trådar

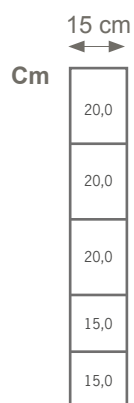

90/6/15

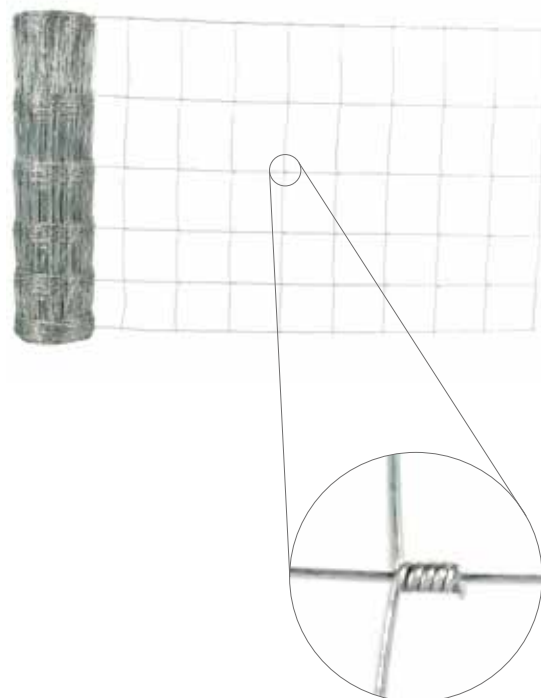

### MEDIUM

	Dia mm	100 m/rulle TS N/mm <sup>2</sup>
Selvedge Wire (kantråd)	2,50	1150-1350
Line wire	2,00	1200-1400
Stay wire	1,90	400-550