


## Vridknut 160-22-15

Vertikala trådar är avklippta och virade runt de horisontella trådarna.


*\*ISO 16120-2 Non alloy steel wire rod for conversion to wire Part 2: Specific requirements for general purpose wire rod.*

*\*EN10244-2 Steel wire and wire products – Non-ferrous metallic coatings on steel wire Part 2: Zinc or zinc-alloy coatings.*

**160-22-15 =** Höjd/Antal Horisontella Trådar/Bredd Lodräta trådar

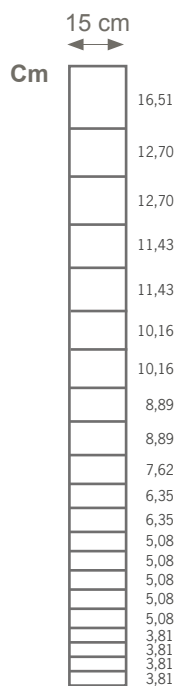

160-22-15

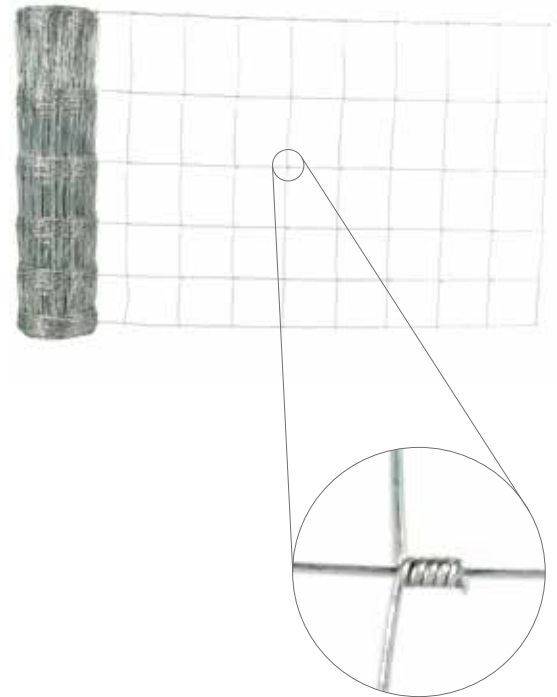

	Dia mm	50 m/rulle TS N/mm <sup>2</sup>
Selvedge Wire (kantråd)	2,50	Min 695
Line wire	2,00	Min 695
Stay wire	2,00	Min 415