


Vridknut 200-24-15

Vertikala trådar är avklippta och virade runt de horisontella trådarna.


**ISO 16120-2 Non alloy steel wire rod for conversion to wire Part 2:
Specific requirements for general purpose wire rod.*

**EN10244-2 Steel wire and wire products – Non-ferrous metallic coatings
on steel wire Part 2: Zinc or zinc-alloy coatings.*

200-24-15 = Höjd/Antal Horisontella Trådar/Bredd Lodräta trådar

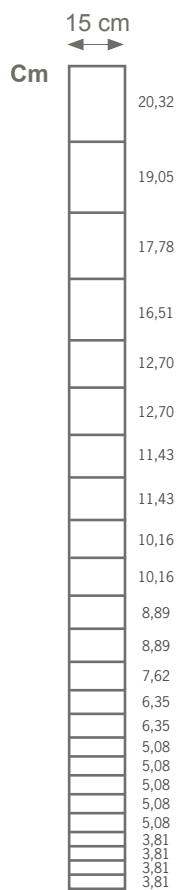

200-24-15

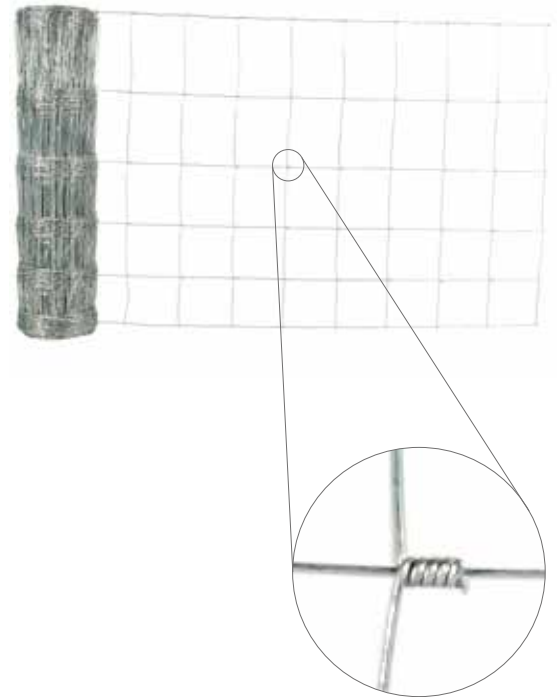

	Dia mm	50 m/rulle TS N/mm ²
Selvedge Wire (kantråd)	2,50	Min 695
Line wire	2,00	Min 695
Stay wire	2,00	Min 415